



OPEN FRAME RACKS

SECTION


03

4-POST FLOOR RACKS
Adjustable

2-POST FLOOR RACKS
Aluminum & Steel

WALL MOUNT RACKS
Fixed & Swing-Out

WALL MOUNT BRACKETS
Hinged & Non-Hinged

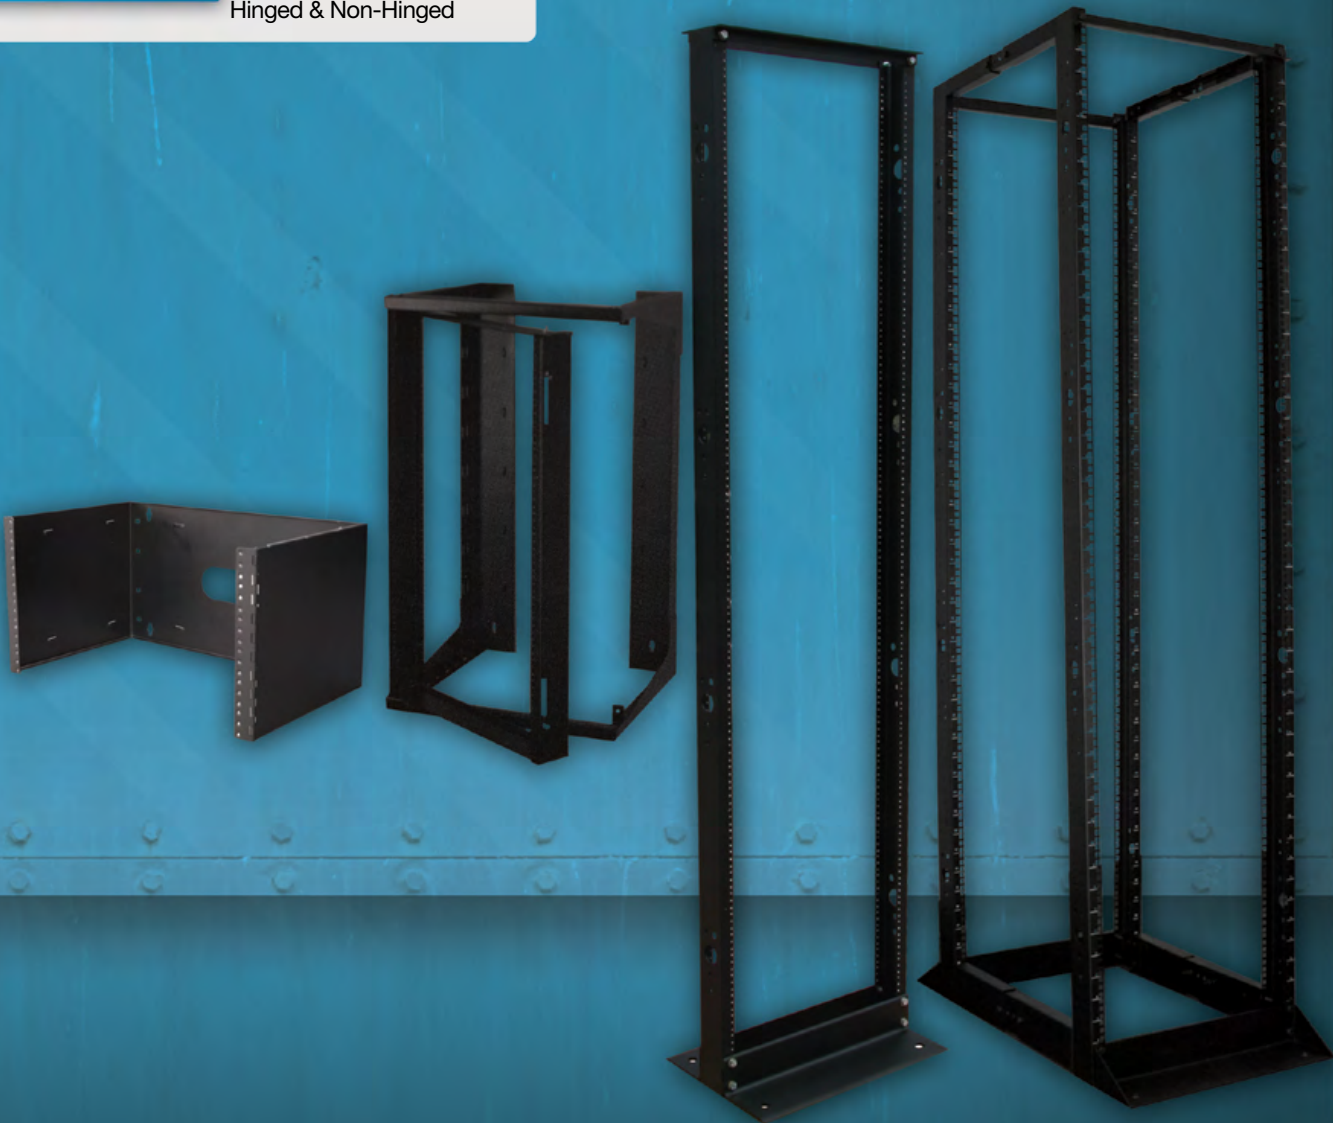



OPEN FRAME RACKS

4PR 4-Post Open Frame Racks **Page No.**

4PR Series Adjustable **37-38**

2PR 2-Post Open Frame Racks **Page No.**

2PR Series Aluminum & Steel **39-40**

WMR Wall Mount Open Frame Racks **Page No.**

WMR Series Adjustable, Fixed & Swing-Out **41**

WMB Wall Mount Brackets **Page No.**

WMB Series Hinged & Non-Hinged **42**

NEW **BRACKET DESIGN**

SECTION
03



OPEN FRAME FLOOR RACKS

4-POST
ADJUSTABLE

SECTION
03



4PR 4-Post Open Frame Racks

	4PR SERIES 4FT.	7FT.
Item No.	FR1924-28-02	FR1924-45-02
Rack Size Height (Rack Units)	54" (28U)	84" (45U)
Rack Size Width	21"	21"
Rack Size Depth	Adjustable 24"-36"	Adjustable 24"-36"
Mounting Format	19"	19"
Load Capacity	1000lbs	1700lbs
Dual Mounting Rails	Cage Nut (#12-24)	Cage Nut (#12-24)
Numbered RU positions	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black
Cage Nuts, Screws & Washers	20 each	40 each
Cable Management D-Rings (Plastic)	16	32
Base Design	Floor Mount	Floor Mount
Compliance	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown

**Cable Management
D-Rings Included**



4PR Structure and Fabrication

Item No.	Color	Rack Units (U)	Material	Posts	Top Brackets (AWG)	Base (AWG)
FR1924-28-02	Black	28U	Cold Rolled Steel	4	14	10
FR1924-45-02	Black	45U	Cold Rolled Steel	4	14	10

OPEN FRAME FLOOR RACKS

4-POST
ADJUSTABLE



4PR 4-Post Open Frame Racks

Item No.	Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Knockdown)
		H	W	D	H	W	D		
FR1924-28-02	28U	54"	21"	24"-36"	49"	19"	24"-36"	1000	53
FR1924-45-02	45U	84"	21"	24"-36"	79"	19"	24"-36"	1700	66

SECTION

03

4PR Adjustable Depth



Pre-drilled adjustable depths are:
24", 26.5", 29", 31.5", 34", 36".

4PR Floor Mount Holes



Constructed with mounting holes for
mounting securely to floor.

4PR Dual-Sided Rails



"U" shaped cage nut rail design to allow
front and rear mounting of equipment.

4PR Angled Top Braces



Reinforced angled top brace supports
provide added load strength.

4PR Rack Unit Numbered Rails



Numbered rack units makes it easier to
configure.



Adjustable Depths
24", 26.5", 29", 31.5", 34", 36"



OPEN FRAME FLOOR RACKS

2-POST
ALUMINUM & STEEL

2PR 2-Post Open Frame Racks

SECTION
03



2-POST ALUMINUM FRAME	3FT.	4FT.	7FT.
Item No.	FR1903-20-02	FR1904-28-02 (Black) FR1904-28-03 (Silver)	FR1907-45-02 (Black) FR1907-45-03 (Silver)
Rack Size Height (Rack Units)	40" (20U)	54" (28U)	84" (45U)
Rack Size Width	21"	21"	21"
Rack Size Depth	Open	Open	Open
Mounting Format	19"	19"	19"
Load Capacity	400lbs	500lbs	1000lbs
Dual Mounting Rails	Tapped (#12-24)	Tapped (#12-24)	Tapped (#12-24)
Numbered RU positions	Yes	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black (-02 Only)	Black (-02 Only)
Screws & Washers	12 each	20 each	40 each
Base Design	Floor Mount	Floor Mount	Floor Mount
Compliance	EIA-310D	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown	Knockdown

2-POST STEEL FRAME	7FT.	7FT.
Item No.	FR1907-45-02SC	FR1907-45-02S
Rack Size Height (Rack Units)	88" (45U)	84" (45U)
Rack Size Width	24"	21"
Rack Size Depth	24"	22.5"
Mounting Format	19"	19"
Load Capacity	1000lbs	1000lbs
Dual Mounting Rails	Cage Nut (#12-24)	Cage Nut (#12-24)
Numbered RU positions	Yes	Yes
Electrostatic Powdercoat MicroFinish	Black	Black
Cage Nuts, Screws & Washers	28 each	28 each
Base Design	Casters	Floor Mount
Compliance	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown

2PR Structure and Fabrication

Item No.	Color	Rack Units (U)	Material	Posts	Side Rails (AWG)	Top Brackets (AWG)	Base (AWG)
2-POST ALUMINUM FRAME							
FR1903-20-02	Black	20U	6063 T6 Aluminum	2	5	5	2
FR1904-28-02	Black	28U	6063 T6 Aluminum	2	5	5	2
FR1904-28-03	Silver	28U	6063 T6 Aluminum	2	5	5	2
FR1907-45-02	Black	45U	6063 T6 Aluminum	2	5	5	2
FR1907-45-03	Silver	45U	6063 T6 Aluminum	2	5	5	2
2-POST STEEL FRAME							
FR1907-45-02S	Black	45U	Cold Rolled Steel	2	13	13	9
FR1907-45-02SC	Black	45U	Cold Rolled Steel	2	13	13	13

OPEN FRAME FLOOR RACKS

2-POST

ALUMINUM & STEEL




2PR 2-Post Open Frame Racks

Item No.	Rack Units (1U=1.75") 19" Format	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Knockdown)
		H	W	D	H	W	D		
FR1903-20-02	20U	40"	21"	3"	35"	19"	3"	400	18
FR1904-28-02	28U	54"	21"	3"	49"	19"	3"	500	21
FR1904-28-03	28U	54"	21"	3"	49"	19"	3"	500	21
FR1907-45-02	45U	84"	21"	3"	79"	19"	3"	1000	27
FR1907-45-03	45U	84"	21"	3"	79"	19"	3"	1000	27
FR1907-45-02S	45U	84"	21"	3"	79"	19"	3"	1000	37
FR1907-45-02SC	45U	88"	24"	3"	79"	19"	3"	1000	64

SECTION
03

2PR Floor Mount Holes



Standard racks are available with floor mount holes for mounting securely to floor.

2PR Locking Casters



Available in a caster version with locking casters for flexibility in relocation of the rack.

2PR Dual-Sided Rails



"U" shaped cage nut rail design to allow front and rear mounting of equipment.

2PR Reinforced Angled Top Braces



Reinforced angled top brace supports provide added load strength.

2PR Rack Unit Numbered Rails



Numbered rack units makes it easier to configure.





WALL MOUNT RACKS

2-POST

ADJUSTABLE, FIXED & SWING-OUT RACKS

SECTION

03



WMR Open Frame Wall Mount Racks

	Fixed	Swing-Out	Adjustable
Rack Size Height (Rack Units)	23" (13U) 28" (16U) 35" (20U)	39" (20U) 48" (25U)	20" (12U) 37" (18U) 49" (25U)
Post Rails	2	2	2
Rack Size Width	21"	21"	21"
Rack Size Depth	12"	18" or 24"	18" - 26"
Mounting Format	19"	19"	19"
Dual Tapped Rails	Yes (#12-24)	Yes (#12-24)	Yes (#12-24)
Material	T6063 Aluminum	T6063 Aluminum	T6063 Aluminum
Base & Bracket (AWG)	13 AWG	13 AWG	13 AWG
Side Rails (AWG)	5 AWG	13 AWG	5 AWG
Powdercoat MicroFinish	Black	Black	Black
Screws & Washers (#12-24)	16 each	20 each	16 each
Compliance	EIA-310D	EIA-310D	EIA-310D
Delivery Style	Knockdown	Knockdown	Knockdown

WMR Open Frame Wall Mount Racks

Item No.	Style	Rack Units (1U=1.75")	External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Knockdown)
			H	W	D	H	W	D		
WR1922-13-02	Fixed	13U	23"	21"	12"	19.5"	19"	12"	150	13
WR1928-16-02	Fixed	16U	28"	21"	12"	24.5"	19"	12"	165	15
WR1928-20-02	Fixed	20U	40"	21"	12"	35"	19"	12"	220	17
SR1935-20-02	Swing-Out	20U	40"	21"	18"	35"	19"	18"	80	46
SR1935-20-02D	Swing-Out (Deep)	20U	40"	21"	24"	35"	19"	24"	80	46
SR1943-25-02	Swing-Out	25U	49"	21"	18"	43.75"	19"	18"	98	52
SR1943-25-02D	Swing-Out (Deep)	25U	49"	21"	24"	43.75"	19"	24"	98	52
SR1921-12-02	Adjustable Swing-Out	12U	20"	21"	18"-26"	15"	19"	18"-26"	100	27
SR1921-18-02	Adjustable Swing-Out	18U	37"	21"	18"-26"	32"	19"	18"-26"	100	41
SR1921-25-02	Adjustable Swing-Out	25U	49"	21"	18"-26"	43.75"	19"	18"-26"	100	56

WMR Adjustable Depth Swing-Out Design



Available in Adjustable Depth version to accommodate deep mounted equipment. Swing-Out design for flexibility in accessing the back of the equipment.

WMR Swing-Out Design



Available in a Fixed or Swing-Out design for flexibility in accessing the back of the equipment.

WMR Dual-Sided Rails



"U" shaped 12-24 Tapped rail design to allow front and rear mounting of equipment.

WALL MOUNT BRACKETS

2-POST

HINGED & NON-HINGED



WMB Wall Mount Bracket Series

NEW BRACKET DESIGN

	Non-Hinged	Hinged-Horizontal	Hinged-Vertical
Rack Size (Rack Units)	3.5" (2U) 5.25" (3U) 7.0" (4U) 10.5" (6U) 12.25" (7U)	1.75" (1U) 3.5" (2U) 5.25" (3U) 7.0" (4U) 10.5" (6U)	3.5" (2U) 5.25" (3U) 7.0" (4U)
Rack Size Width	20"	20"	19.5"
Rack Size Depth	6" or 12"	6" or 12"	5"(2U), 7"(3U), 9"(4U)
Mounting Format	19"	19"	19"
Hinged Swing Out Design	No	Yes	Yes
Dual Tapped Rails	Yes (#12-24)	Yes (#12-24)	Yes (#12-24)
Material	Cold Rolled Steel	Cold Rolled Steel	Cold Rolled Steel
AWG (Rails & Rear Plate)	15	15	16
Electrostatic Powdercoat MicroFinish	Black	Black	Black
Screws & Washers (#12-24)	4 each	4 each	4 each
Compliance	EIA-310D	EIA-310D	EIA-310D
Delivery Style	Assembled	Assembled	Assembled

SECTION


03



Non-Hinged



Hinged-Horizontal

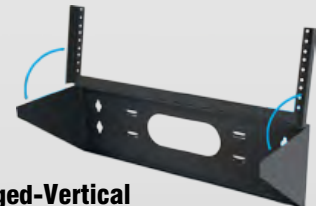

Hinged-Vertical

WMB Wall Mount Bracket Series

Item No.	Rack Units (1U=1.75") 19" Format		External Dimensions (inch)			Internal Dimensions (inch)			Load Capacity (lbs.)	Shipping Weight (Assembled)
	Non-Hinged	Hinged-Horizontal	H	W	D	H	W	D		
---	WB19-0106H	1U	1.75"	21"	6"	1.75"	19"	6"	10	2
WB19-0206N	WB19-0206H	2U	3.0"	21"	6"	3.0"	19"	6"	15	3
WB19-0306N	WB19-0306H	3U	5.25"	21"	6"	5.25"	19"	6"	20	4
WB19-0406N	WB19-0406H	4U	7.0"	21"	6"	7.0"	19"	6"	25	5
WB19-0606N	WB19-0606H	6U	10.5"	21"	6"	10.5"	19"	6"	35	6
WB19-0412N	WB19-0412H	4U	7.0"	21"	12"	7.0"	19"	12"	30	7
WB19-0612N	WB19-0612H	6U	10.5"	21"	12"	10.5"	19"	12"	40	10
WB19-0712N	---	7U	12.25"	21"	12"	12.25"	19"	12"	45	11
	Hinged-Vertical		H	W	D	H	W	D		
	NEW WV19-0205H	2U	6"	19.5"	5"	---	19"	---	35	4.4
	WV19-0307H	3U	6"	19.5"	7"	---	19"	---	35	4.75
	WV19-0409H	4U	6"	19.5"	9"	---	19"	---	35	5

WMB Hinged Design



Available in a Fixed or Swing-Out design for flexibility in accessing the back of the equipment. Hinged vertical brackets allow easy access to the back of the equipment.

WMB Extended Depth



"U" shaped #12-24 Tapped rail design to available in 6" or 12" depths for mounting deeper equipment.